
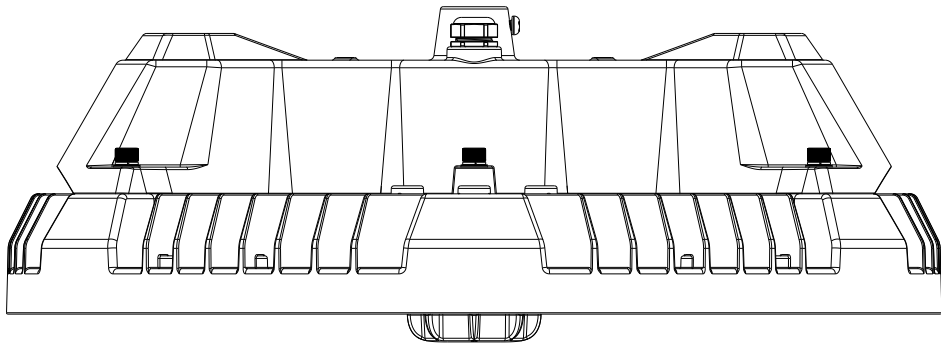
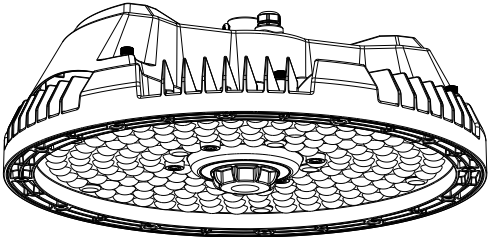


Simplitz® Highbay V3

绚丽高天棚灯三代


絢麗高天棚燈三代

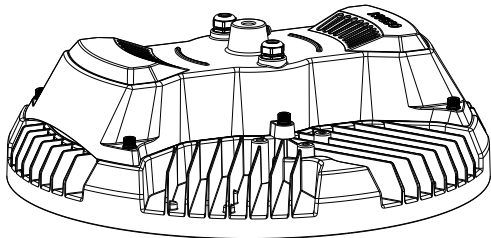

Please read instruction carefully before assembling and installation
Please keep instruction as reference in the future
在您組裝產品前請仔細閱讀本說明書，請您保留本說明書作為日後參考

OSRAM

Simplitz® Highbay V3 | 绚丽高天棚灯三代 | 絢麗高天棚燈三代

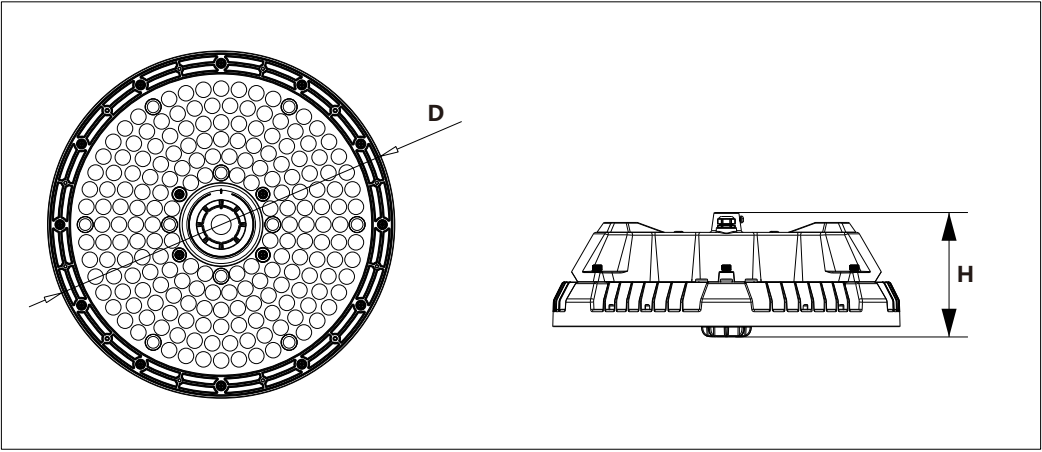


Mode 型号/型號	φ D (mm)	H (mm)	Wattage 功率/功率 (w)	LED Qty LED顆數/LED顆數 (pcs)	Weight 重量/重量 (g)	IP	ta
SIM HB V3 50W 8XX YYD DIM GY	270	162	050	200	2800	IP66	50℃
SIM HB V3 70W 8XX YYD DIM GY	270	162	070	200	2800		
SIM HB V3 100W 8XX YYD DIM GY	270	162	100	230	2800		
SIM HB V3 125W 8XX YYD DIM GY	270	162	125	292	2850		
SIM HB V3 150W 8XX YYD DIM GY	310	172	150	356	3500		
SIM HB V3 180W 8XX YYD DIM GY	350	177	180	464	4000		
SIM HB V3 200W 8XX YYD DIM GY	350	177	200	464	4000		
SIM HB V3 240W 8XX YYD DIM GY	390	177	240	574	4500		
SIM HB V3 50W 8XX YYD DA GY	270	162	050	200	2800		
SIM HB V3 70W 8XX YYD DA GY	270	162	070	200	2800		
SIM HB V3 100W 8XX YYD DA GY	270	162	100	230	2800		
SIM HB V3 125W 8XX YYD DA GY	270	162	125	292	2850		
SIM HB V3 150W 8XX YYD DA GY	310	172	150	356	3500		
SIM HB V3 180W 8XX YYD DA GY	350	177	180	464	4000		
SIM HB V3 200W 8XX YYD DA GY	350	177	200	464	4000		
SIM HB V3 240W 8XX YYD DA GY	390	177	240	574	4500		
Remark: 'XX' stands for CCT of LED, can be 27 to 65, e.g. 27=2700K, 65=6500K;'YY' stands for Beam angle, can be 90=90°, 60=60°. 备注: 'XX'代表LED的CCT，可以是27 ~ 65，如27=2700K, 65=6500K；“YY”代表光束角度，可以是90=90度，60=60度。 備註: 'XX'代表LED的CCT，可以是27 ~ 65，如27=2700K, 65=6500K；“YY”代表光束角度，可以是90=90度，60=60度。							

P2

OSRAM


Simplitz® Highbay V3 | 绚丽高天棚灯三代 | 絢麗高天棚燈三代

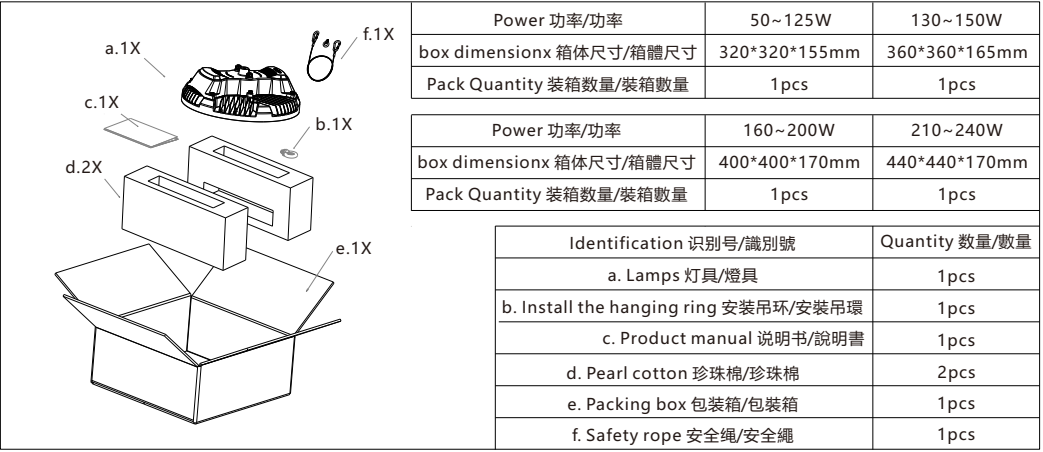

	Power 功率/功率	50~125W	130~150W
	box dimensionx 箱体尺寸/箱體尺寸	320*320*155mm	360*360*165mm
	Pack Quantity 装箱数量/装箱數量	1pcs	1pcs
	Power 功率/功率	160~200W	210~240W
	box dimensionx 箱体尺寸/箱體尺寸	400*400*170mm	440*440*170mm
	Pack Quantity 装箱数量/装箱數量	1pcs	1pcs
Identification 识别号/識別號			Quantity 数量/數量
a. Lamps 灯具/燈具			1pcs
b. Install the hanging ring 安装吊环/安装吊環			1pcs
c. Product manual 说明书/說明書			1pcs
d. Pearl cotton 珍珠棉/珍珠棉			2pcs
e. Packing box 包装箱/包装箱			1pcs
f. Safety rope 安全绳/安全繩			1pcs
A1 Chain Mounting (Standard configuration) 吊链安装/吊鏈安裝（标配/標配）			
Tighten the lifting eye 拧紧吊环/擰緊吊環			
A2			
Tighten the anti-skid screws 拧紧防滑螺丝/擰緊防滑螺絲			
A3			
Open the latch and pass through the lifting ring 打开锁扣穿过吊环/打開鎖扣穿過吊環			
A4			
Install the anti-falling safety rope onto the auxiliary lifting ring 将防脱落安全绳安装到辅助吊环上 將防脫落安全繩安裝到輔助吊環上			

P3

OSRAM

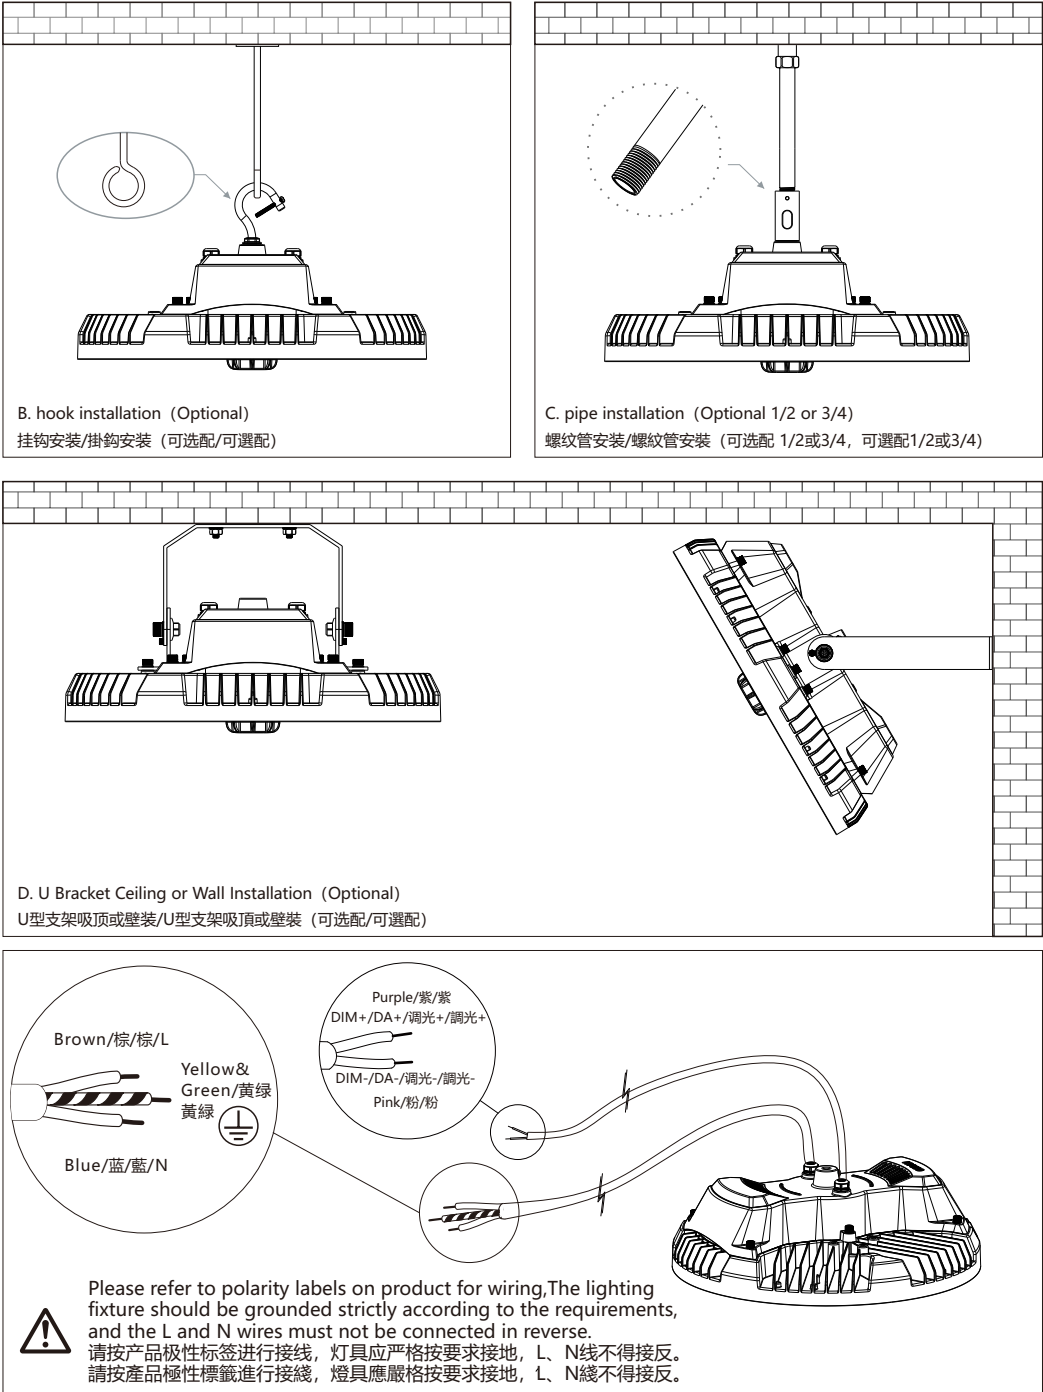

WARNING / 警告/警告

1. The luminaire should be installed and maintained by qualified electrician and wired in accordance with the latest IEE electrical regulations or the national regulations. Terminal block not included. Installation must be performed by a qualified person. Installer need to connect the product in an approved junction box with the corresponding IP rating.
燈具須由有資格的专业人员安裝及維護, 接線須符合最新的IEE標準或國家標準。燈具不提供接線端子, 必須由有資質的人員進行安裝, 安裝人員需要將產品連接到符合相同IP等級的接線盒中。

2. Power supply system should be equipped with SPD (Surge protection Device) accordance with electrical regulations.
接入燈具的供電系統須滿足浪涌防護要求, 供電系統須安裝符合標準的浪涌保護器。

3. Make sure the products are grounded.
確保產品可靠接地。
確保產品可靠接地。

4. The power must be OFF during installation and maintenance.
安裝及維護過程中嚴禁通電。

5. The external flexible cable or cord of this luminaire cannot be replaced. If the cord is damaged, the luminaire shall be destroyed.
此燈具的外部軟電纜或者軟線不能替換, 如果軟線損壞, 該燈具即報廢。

6. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
此燈具內的光源應由製造商或其服務代理商或一個有類似資格的人來更換。

7. Make sure the products are securely installed.
確保產品被可靠固定以免跌落。
確保產品被可靠固定以免跌落。

8. The housing might become hot during or after operation.
產品外壳在使用過程中或使用後可達較高溫度。

9. Do not modify the structure of the lighting fixture or replace any parts by yourself.
不可自行更改燈具結構或更換部件。

10. For indoor use only, Dot not immerse in water.
用於室內, 不可浸水。

11. Do not use the lighting fixture at an excessive temperature. the lighting fixture should work within the specified range of the ambient temperature.
不可超溫使用, 燈具所處的使用環境溫度應在標稱範圍以內。

12. Corrosivity in the using environment can't exceed the specified anti-corrosion grade.
使用環境中的腐蝕性不得超過規定的防腐等級。

13. Caution, risk of electric shock.
注意, 有觸電危險。



Conformance to 执行标准/執行標準:
GB 7000.1 灯具 第一部分: 一般要求与实验
燈具 第一部分: 一般要求與試驗
GB 7000.201 灯具 第2-1部分: 特殊要求, 固定式通用灯具
燈具 第2-1部分: 特殊要求, 固定式通用燈具
GB 17625.1 电磁兼容、限值、谐波电流发射限制 (设备每相输入电流≤16A)
電磁兼容、限值、諧波電流發射限制 (設備每相輸入電流≤16A)
GB/T 17743 电气照明和类似设备的无线电骚扰特性的限制和测量方法
電氣照明和類似設備的無線電騷擾特性的限制和測量方法

产品中有害物质的名称及含量

	有害物质					
部件名称	铅(Pb)	汞(Hg)	镉(Cd)	六价铬(Cr(VI))	多溴联苯(PBB)	多溴二苯醚(PBDE)
电子元器件	×	○	○	○	○	○
本表格依据SJ/T 11364的规定编制。 ○: 表示该有害物质在该部件所有均质材料中的含量均在GB/T 26572规定的限量要求以下。 ×: 表示该有害物质至少在该部件的某一均质材料中的含量超出GB/T 26572规定的限量要求。						
FOR P.R.C. ONLY 本标志适用于在中华人民共和国销售的电子电气产品, 标志中央的数字代表产品的环保适用期限。 只要您遵守与本产品相关的安全与使用方面的注意事项, 在从生产日期起算的上述年限内, 就不会产生环境污染或对人体及财产的严重影响。						

Traxon Lighting Company Limited
B402 - B421, Building 6, Northwest Shenjiu Science and Technology Pioneer Park,
the intersection of Taohua Road and Binglang Road, Fubao Community, Fubao Street,
Futian District, Shenzhen
卓生照明有限公司
深圳市福田区福保街道福保社区桃花路与槟榔道交汇处西北深九科技园6号楼B402- B421
卓生照明有限公司
深圳市福田区福保街道福保社區桃花路與檳榔道交匯處西北深九科技創業園6號樓B402- B421

