

WARNING / 警告：

1. Ensure that any installation and maintenance be performed by a qualified electrician (Terminal block not included) and the luminaire is wired in accordance with the latest IEE electrical regulations or the local equipments. Ensure that the power supply is off before starting installation and maintenance. Do not switch on until the installation or maintenance is completed. 安装和维护仅由专业人员完成（不包括接线端子），且接线符合IEE电器规范或国家标准。安装和维护前，请关闭电源，安装和维护中，切勿通电。 安装和维护仅由专业人员完成（不包括接线端子），且接线符合IEE电器规范或国家标准。安装和维护前，请关闭电源；安装和维护中，切勿通电。 The external flexible cable or cord of this lamp cannot be replaced; If the flexible cable is damaged, the lamp should be scrapped. The light source of this lamp is non replaceable; When the light source reaches its end of life, the entire lamp should be replaced. 此灯具的外部软线或软线不能替换；如果软线损坏，该灯具即应报废。此灯具的光源是不可替换的；当光源到其寿命终时，应替换整个灯具。 此灯具的外部软线或软线不能替换；如果软线损坏，该灯具即应报废。此灯具的光源是不可替换的；当光源到其寿命终时，应替换整个灯具。 3. Ensure that the luminaire be installed under canopy when used in outdoor. Not suitable for LED tube lamps. 灯具户外使用请务必安装于遮篷物下。LED灯管不适用于此灯具。 燈具戶外使用請務必安裝於遮篷物下。LED 燈管不適用於此燈具。 4. Insulation information: 绝缘信息: 絕緣信息: 1). Reinforced insulation is maintained between live prats (L/N) and output circuit (SELV parts); 带电部分 (L/N) 和输出电路 (SELV部分) 之间已满足加强绝缘; 帶電部分 (L/N) 和輸出電路 (SELV部分) 之間已滿足加強絕緣; 2). Basic insulation is maintained between live parts (L/N) and DALI dimming circuit (FELV parts); 带电部分 (L/N) 和DALI调光电路 (FELV部分) 之间已满足基本绝缘; 帶電部分 (L/N) 和DALI調光電路 (FELV部分) 之間已滿足基本絕緣; 3). Supplementary insulation is maintained between DALI dimming circuit (FELV parts) and DALI调光电路 (FELV 部分) 和输出电路 (SELV 部分) 已满足附加绝缘; DALI調光電路 (FELV 部分) 和輸出電路 (SELV 部分) 已滿足附加絕緣;

Conformance to:
执行标准

GB7000.1 灯具 第1部分: 一般安全要求与试验

GB7000.201 灯具 第2-1部分: 特殊要求固定式通用灯具

GB17743电气照明和类似设备的无线电骚扰特性的限值和测量方法

GB17625.1 (> 5W) 电子兼容 限值 第1部分: 谐波电流发射限值(设备每相输入电流≤16A)

Traxon Technologies Ltd.
Room 113, 1/F, Wireless Centre, 3 Science Park East Avenue, Shatin, New Territories, Hong Kong

Traxon Technologies Europe GmbH
Karl-Schurz-Str. 38, 33100 Paderborn, Germany

Traxon Lighting Company Limited
B402 - B421, Building 6, Northwest Shenjiu Science and Technology Pioneer Park, the intersection of Taohua Road and Binglang Road, Fubao Community, Fubao Street, Futian District, Shenzhen

卓生照明有限公司
深圳市福田区福保街道福保社区桃花路与槟榔道交汇处西北深九科技创业园 6 号楼 B402- B421
www.traxon-ecue.com

IP65




Caution, risk of electric shock



TRA:ON | e:cue
MEMBER OF PROSPERITY GROUP



Simplitz® Waterproof V2 绚丽三防支架二代 絢麗三防支架二代

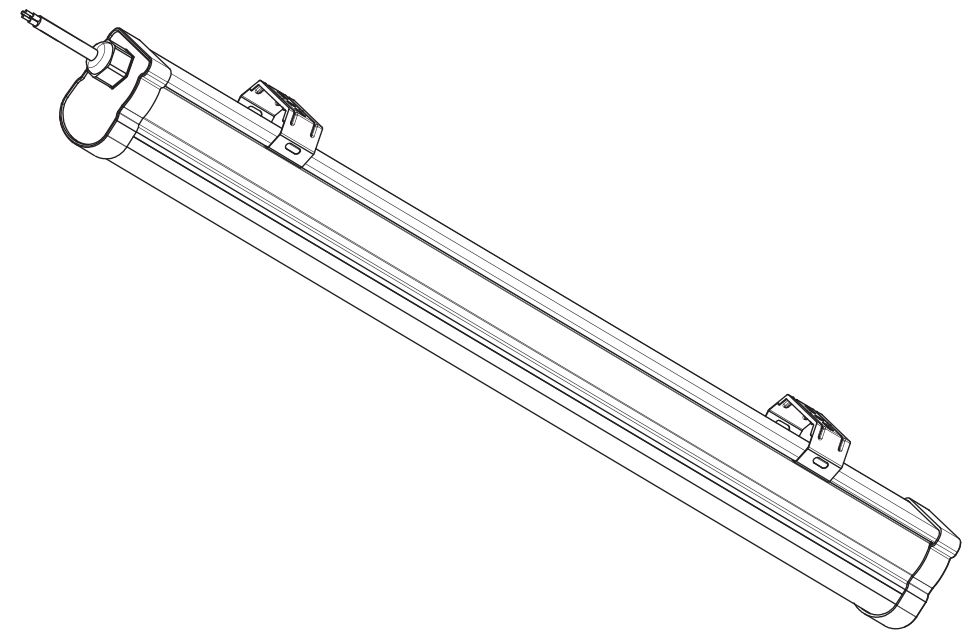

- Please read instruction carefully before assembling and installation
在您组装产品前请仔细阅读本说明书
在您組裝產品前請仔細閱讀本說明書
- Please keep instruction as reference in the future
请您保留本说明书作为日后参考
請您保留本說明書作為日後參考



TRA:ON | e:cue
MEMBER OF PROSPERITY GROUP




Simplitz®Waterproof V2 / 绚丽三防支架二代 / 絢麗三防支架二代




	SIM WP V2 17W 8XX L1200 WH 8XX L1200 DA WH	SIM WP V2 33W 8XX L1200 WH 8XX L1200 DA WH	SIM WP V2 28W 8XX L1500 WH 8XX L1500 DA WH	SIM WP V2 50W 8XX L1500 WH 8XX L1500 DA WH
Dimensions (L x W x H)	1188 x 64 x 66 mm	1188 x 64 x 66 mm	1468 x 64 x 66 mm	1468 x 64 x 66 mm
Wattage(W)	17W	33W	28W	50W
Voltage(V)	220-240V	220-240V	220-240V	220-240V
Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Weight (on/off)	0.9 kg	0.9 kg	1.04 kg	1.04 kg
Weight (DALI)	1.03 kg	1.03 kg	1.19 kg	1.25 kg
IP	IP65	IP65	IP65	IP65
Ta	-20 ~ 40°C	-20 ~ 40°C	-20 ~ 40°C	-20 ~ 40°C

'XX' representative CCT,can be 40, 57, 65; 65=6500K, 40=4000K, 57=5700K

1

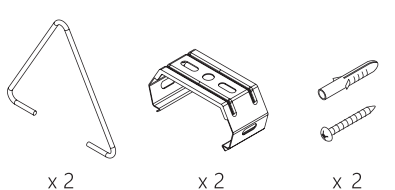


2

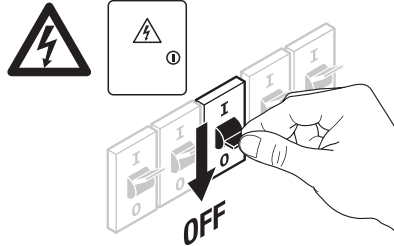


Simplitz®Waterproof V2 / 绚丽三防支架二代 / 絢麗三防支架二代

3A - Ceiling mount / 表面安装 / 表面安装




4A

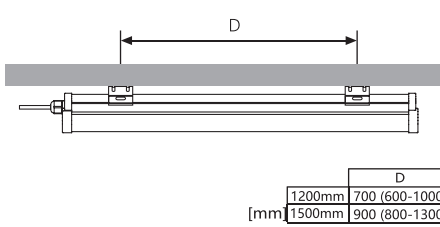


3B - Suspension mount / 悬挂安装 / 懸掛安裝




4B

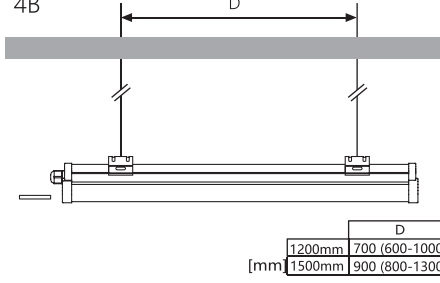


5A - Wiring / 接线 / 接線 on/off

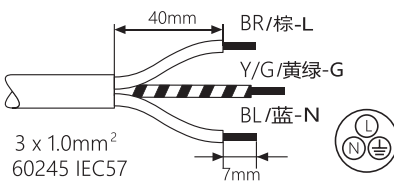

5B - Wiring / 接线 / 接線 DALI

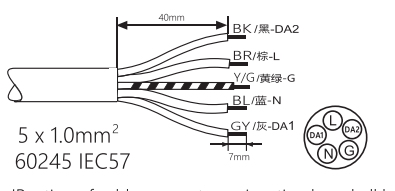

6

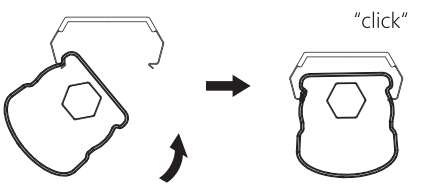

7

